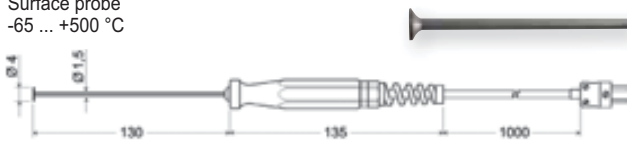
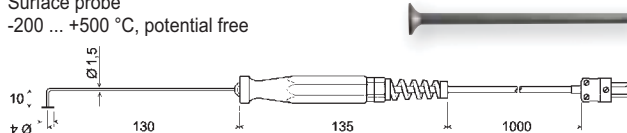
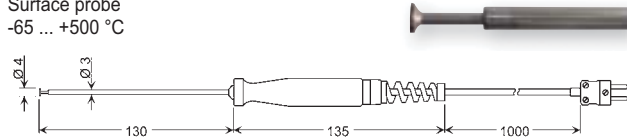

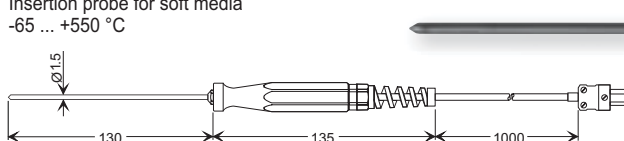
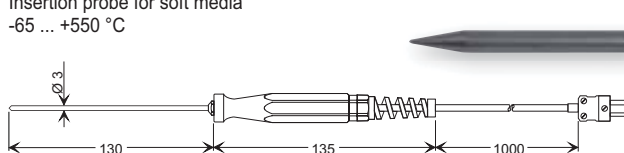
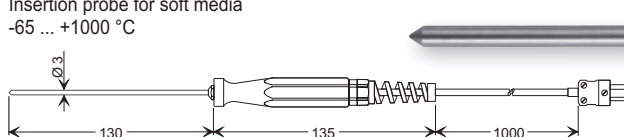
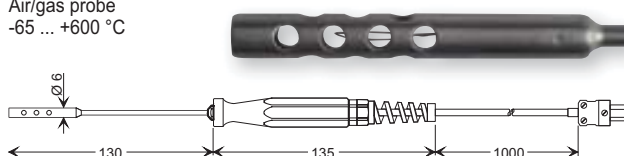


Type K - Measuring Probe (NiCr-Ni) With DIN-type flat-pin plug

-65 °C
+500 °C**GOF 500**Art. no. 600488
Surface probe
-65 ... +500 °C

for any straight and solid surface; solid copper plate, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : water 0.4 m/s approx. 5 s-200 °C
+500 °C**GOF 500 HO**Art. no. 600498
Surface probe
-200 ... +500 °C, potential freefor any straight and solid surface, small elbow-type, solid copper plate, \varnothing 1.5 MTE (K) Inconel 600 bendable, plastic handle, anti-buckling glanding, 1 m silicone cable, Miniature flat plug**Response time T_{90} :** approx. 5 s-65 °C
+500 °C**GOF 130 CU**Art. no. 600486
Surface probe
-65 ... +500 °Cfor any straight and solid surface
Spring-loaded copper plate, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** approx. 5 s-65 °C
+500 °C**GES 20K**Art. no. 602591
Core temperature- / food probe
-65 ... +500 °C**VERY THIN**Use for canteen kitchen, bakeries, butcher's shops, etc.
V4A tube with \varnothing 1.5 mm slim insertion tip, small Teflon handle, stainless steel kink protection, 1 m Teflon cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s <1 s, air 2 m/s approx. 12 s-50 °C
+250 °C**GES 21K**Art. no. 600074
Core temperature- / food probe
-50 ... +250 °C, potential-freeUse for canteen kitchen, bakeries, butcher's shops, etc.
V4A tube \varnothing 3 mm with needle-shaped insertion tip, big white Teflon handle, stainless steel kink protection, 1 m Teflon cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s <2 s, air 2 m/s approx. 40 s-65 °C
+550 °C**GES 130**Art. no. 600514
Insertion probe for soft media
-65 ... +550 °CV4A tube with \varnothing 1.5 mm slim insertion tip, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s approx. 3 s-65 °C
+550 °C**GES 500**Art. no. 600516
Insertion probe for soft media
-65 ... +550 °CV4A tube with \varnothing 3 mm with needle-shaped insertion tip, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s approx. 5 s-65 °C
+1000 °C**GES 900**Art. no. 600518
Insertion probe for soft media
-65 ... +1000 °CSpring-loaded V4A tube with slim \varnothing 3 mm insertion tip, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s approx. 5 s-65 °C
+600 °C**GTL 130**Art. no. 602304
Air/gas probe
-65 ... +600 °C**VERY FAST**for room temperature, flue gases, etc.
perforated V4A protective tube, fused thermocouple wires arranged behind, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** air 2 m/s approx. 1.5 s-65 °C
+200 °C**GKF 125**Art. no. 600520
Probe for compost, grain, etc.
-65 ... +200 °C**VERY ROBUST**split-second response time, yet highly resilient
V4A tube \varnothing 8 mm reduced to \varnothing 3 mm at the front, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s approx. 6 s