

INDUSTRIAL TEMPERATURE PROBES



GTF 200 Pt100

Art. no. 600017
-50 ... +200°C, Pt100, 4-wire

Specifications:	
Sensor:	Pt100, DIN cl. B ($\pm 0.3^\circ\text{C}$ at 0°C)
Sensor sleeve:	made of stainless steel (1.4571), length 50 mm, diameter 5 mm
Cable:	silicone (4×0.14^2), approx. 1 m suitable for 2-/ 3- or 4-wire probe

GTF 200 Pt100 WD

Art. no. 600020
-20 ... +105°C, Pt100, 4-wire, tube enclosed water proof

Specifications:	
Sensor:	Pt100, DIN cl. B ($\pm 0.3^\circ\text{C}$ at 0°C)
Sensor sleeve:	made of stainless steel
Cable:	PVC (4×0.14^2), approx. 1 m suitable for 2-/ 3- or 4-wire probe



GRO 200 Pt100

Art. no. 600012
Temperature probes


GRO 200 Pt1000

Art. no. 600013
Temperature probes, -50 ... +200°C, DIN class B, 4-wire

GRO 200 K

Art. no. 600011
Temperature probes, -50 ... +200°C, Type K (NiCr-Ni)

Specifications:	
Sensor body:	made of aluminium
Probe:	can be mounted with cable clamp or similar constructions to pipes (any diameter)
Cable:	silicone, approx. 2 m For faster heat exchange we suggest our heat-conductive paste GWL10G Art. no. 603267

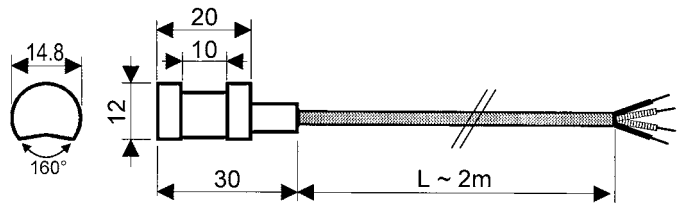

INDUSTRIAL TEMPERATURE PROBES (ATEX 100)



FOR ALL POTENTIALLY EXPLOSIVE
ATMOSPHERES OF THE EQUIPMENT-GROUP II
WITH THE PROTECTION (I) OR (E)

GTF 101-EX

-200°C ... +100°C (without neck tube)
-200°C ... +900°C (with neck tube)

General:	
Readily assembled voltage free temperature probe of stainless steel with connection cable. The sensor inset is not exchangeable. Mounting is done via separate clamping ring fittings GKV.	

Specifications:	
Sensors:	Pt100 / Pt1000; mineral insulated element, 4-wire: Measuring ranges: -200°C ... +100°C (600°C - with neck tube), DIN class B Type K; mineral insulated thermocouple: Measuring ranges: -200°C ... +100°C (900°C - with neck tube), class 1

Probe length:
up to 100mm (without upcharge), upcharge per further starting 100 mm

Neck tube length:
without
upcharge per starting 100 mm

Probe diameter:
3 mm, 4 mm, 5 mm, 6 mm or 8 mm

Cable length (4-wire)

Cable:
silicone cable, Surcharge per additional meter of cable
PVC, teflon (Pt100/Pt1000 only)


Ambient temperature:
-20 ... +60°C (protection type „e“ and protection type „i“ zone 0, 20) or -20 ... +80°C (+60°C) (protection type „i“ zone 1, 2, 21, 22)

Type of protection:
„i“: intrinsic safety
„e“: increased safety (not for zone 0 and 20)

Potentially explosive atmospheres:
suitable for zone 0, zone 1, zone 2, zone 20, zone 21, zone 22

Clamping ring screw connection:
M8x1, M10x1, G1/4" and G1/2" for diameter 3 mm, 6 mm or 8 mm.
Please refer to page 85

To determine exact order name ask for our type list.
Download via homepage possible

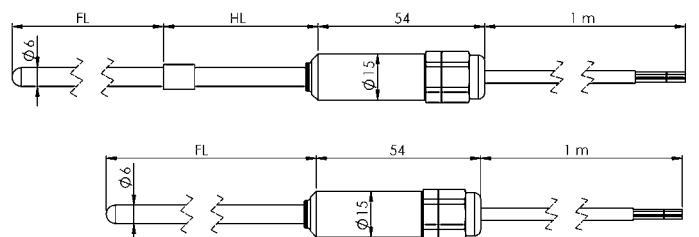

Note: Not all execution options are possible in all zones!

DISPLAY / CONTROLLER

LOGGER - / BUS SYSTEMS

TRANSMITTER

TEMPERATURE PROBE